

Flux Superthermic Insulated Sliding Doors

Sliding Door With Bottom Track



Product Features & Benefits

- Opening to one or both sides up to 10m high and virtually any width
- High wind resistance performance to Class 4
- High thermal insulation $1.53 \text{ W/m}^2\cdot\text{K}$ using our Superthermic panel
- Simplistic galvanised steel top rail hung system requiring only 150mm of headroom (subject to size)
- The pre coated steel skins are available in 8 standard colours with optional painted finish (see overleaf). Aluminium panels are available on request
- Full range of windows (see overleaf)
- Integrated wicket door with or without threshold available with a range a operating security and fire escape hardware
- Manual or electric operation with interlocked shoot bolts for security
- Door CE marked
- Recessed or raised bottom tracks available in a variety of configurations
- Fully adjustable top track, leaves, hinges and bottom seal ensure quick installation times with perfect sealing on all sides



Windows

Can be inserted in every leaf of the door; the dimensions can be customised according to the size of the door leaves.

• Rubber

Made with black EPDM frame, rounded corners (radius approx. 130mm) which makes it possible to insert safety glass up to 10mm thick



• Aluminium with thermal break


Manufactured from an aluminium profile with 90° mitred corners, frame allows for safety glazed glass up to 40mm thick. Available in any geometric shape.



On request, special glass with “low U-values” can be fitted to ensure compliance with relevant building control requirements.

• Dimensions


As standard the following window sizes are available using 8/9mm safety glass. On request special glass with low U value, Georgian wired, double glazed can be used to ensure building control compliance.

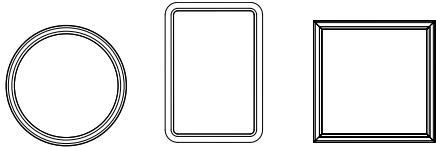

- ø 530mm
- 500 x 600mm
- 500 x 800mm
- 580 x 880mm
- 700 x 700mm
- 700 x 1,000mm
- 700 x 1,500mm
- 700 x 2,000mm

Concealed hinges*

Manufactured from galvanised steel, painted black, with ball bearings. The exclusive concealed hinge system provides the door with greater aesthetics and improved security. The hinges are fixed to the load-bearing frame by means of an adaptor plate, perfectly hidden in the seals of the door (patented system).
*Not on EXIT door



Locking System


Galvanised and powder coated black handle operates the galvanised vertical rods that secure the door when closed. This can be fitted with an external handle, cylinder and key for external access on request.



Finishes

The panel is available as standard in 8 standard pre-coated colours as shown below. Other finishes are available at extra cost including HPS200 and painted finishes to a RAL colour of your choice.

Standard Colours

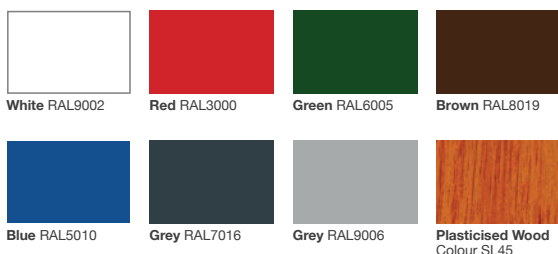

Application

External
Internal

Arrangement

Max 20+20 configuration

Size range

Max. Width
Max. Height
(subject to application)

50,000mm
10,000mm
(subject to application)

Operation

Manual (Standard)
Electric (Optional)

Speed

(dependant on size)

200mm per leaf with either 240v single phase or 415v three phase, earth and neutral motor and traction chain drive.

Emergency Opening

Standard

Curtain

55mm, 65mm & 80mm thick high density foam filled twin skin steel panel with concealed hinge system are used subject to height of door

Wind load resistance

EN12424 – Class 4 – 140km/h

Mechanical Compliance

BS EN12604

Safe Use Of Power Operated Doors

BS EN12453

Safety Equipment

DIN EN13241 – 1

Sound Insulation

22dB



Bottom track manufactured and cost in to suit top track position



Curved top track to suit building profile allows door to return back into the building and be stored neatly minimising space requirement



Brush Seals to top and bottom of each panel and rubber seals to both sides minimises drafts and heat loss



Full height integral access / wicket door to the side that forms a flat appearance when the complete door is closed